



**\*Notes\*:**

- Constructed with vinyl ester filament wound fiberglass laminate with UV inhibitors
- 50 psi working pressure
- Filtration rate of 5 – 15 GPM/SF
- Sand bed type #20 silica NSF 50
- Automatic air relief valve included
- Filter media sold separately
- All units are in inches unless otherwise specified

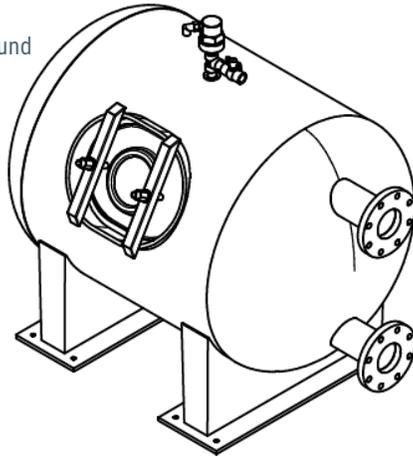

Filter Properties	
Filter Diameter	33 in
Filtration Area	10 SF
Filter Rate	50 – 150 GPM/SF
Backwash Rate (Per Filter)	150 – 200 GPM/SF
Filter Flanges	4 in
Manway Location	Left
Media Quantity (Per Filter)	11.1 CF
Optional Pea Gravel (Per Filter)	2.8 CF
Dry Weight	350 lbs

### Filter Dimensions

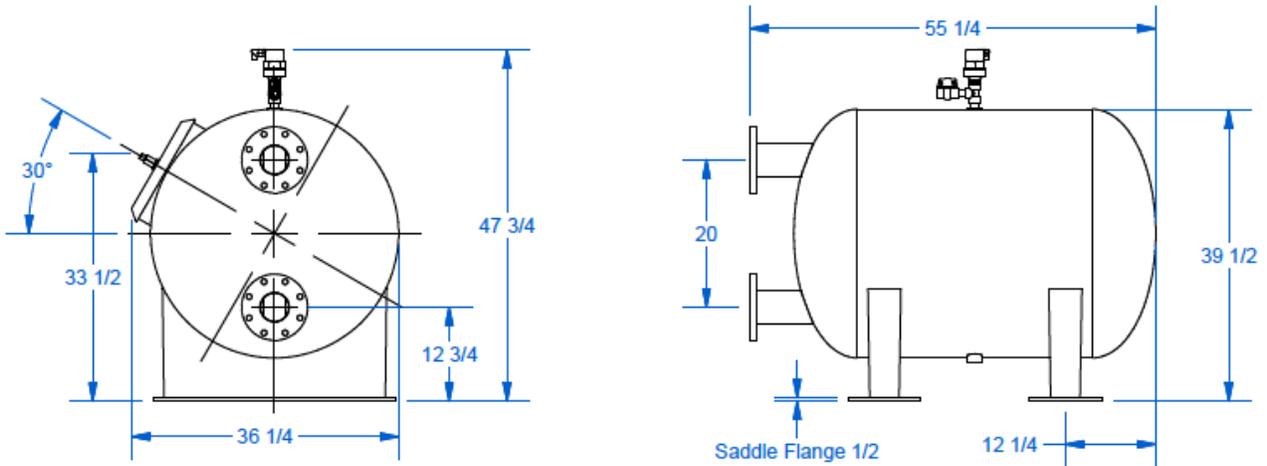

### Saddle Dimensions

