


**\*Notes\*:**




- Constructed with vinyl ester filament wound fiberglass laminate with UV inhibitors
- 50 psi working pressure
- Filtration rate of 5 – 15 GPM/SF
- Sand bed type #20 silica NSF 50
- Automatic air relief valve included
- Filter media sold separately
- All units are in inches unless otherwise specified

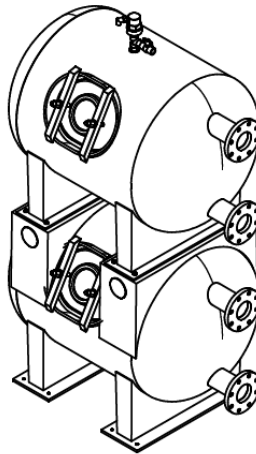

## Filter Properties

|                                  |                  |
|----------------------------------|------------------|
| Filter Diameter                  | 33 in            |
| Filtration Area (Total)          | 20 SF            |
| Filter Rate                      | 100 – 300 GPM/SF |
| Backwash Rate (Per Filter)       | 150 – 200 GPM/SF |
| Filter Flanges                   | 4 in             |
| Manway Location                  | Left             |
| Media Quantity (Per Filter)      | 11.1 CF          |
| Optional Pea Gravel (Per Filter) | 2.8 CF           |
| Dry Weight                       | 725 lbs          |

## Filter Dimensions

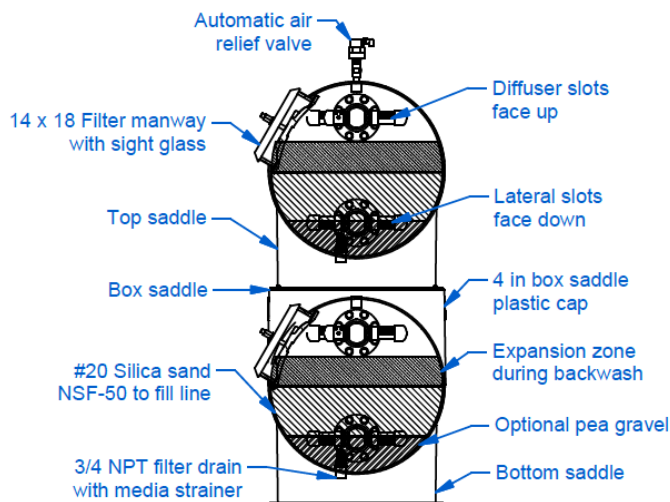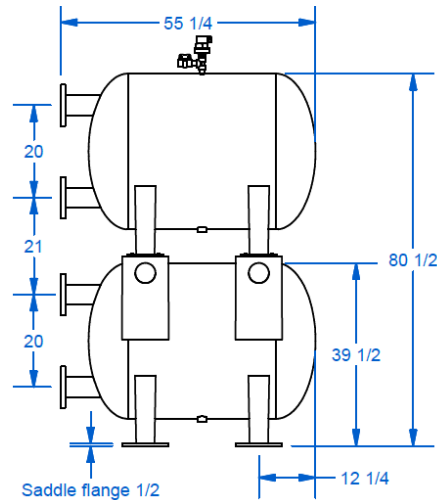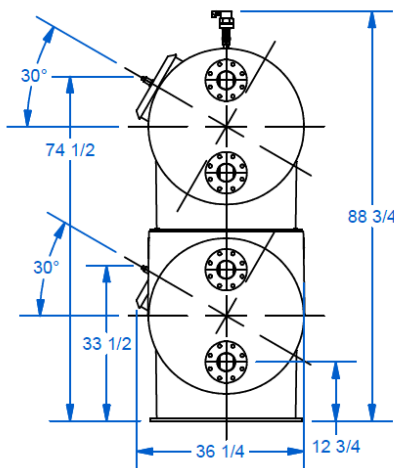

## Saddle Dimensions

