


***Notes*:**


- Constructed with vinyl ester filament wound fiberglass laminate with UV inhibitors
- 50 psi working pressure
- Filtration rate of 5 – 15 GPM/SF
- Sand bed type #20 silica NSF 50
- Automatic air relief valve included
- Filter media sold separately
- All units are in inches unless otherwise specified

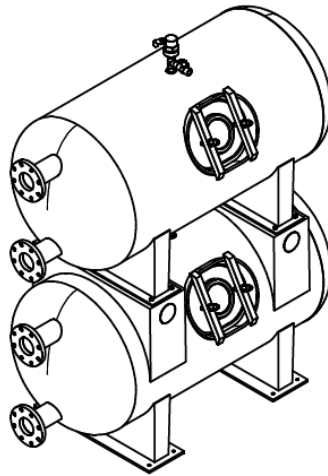

Filter Properties

| | |
|----------------------------------|------------------|
| Filter Diameter | 33 in |
| Filtration Area (Total) | 30 SF |
| Filter Rate | 150 – 450 GPM/SF |
| Backwash Rate (Per Filter) | 225 – 300 GPM/SF |
| Filter Flanges | 4 in |
| Manway Location | Right |
| Media Quantity (Per Filter) | 16.7 CF |
| Optional Pea Gravel (Per Filter) | 4.3 CF |
| Dry Weight | 825 lbs |

Filter Dimensions

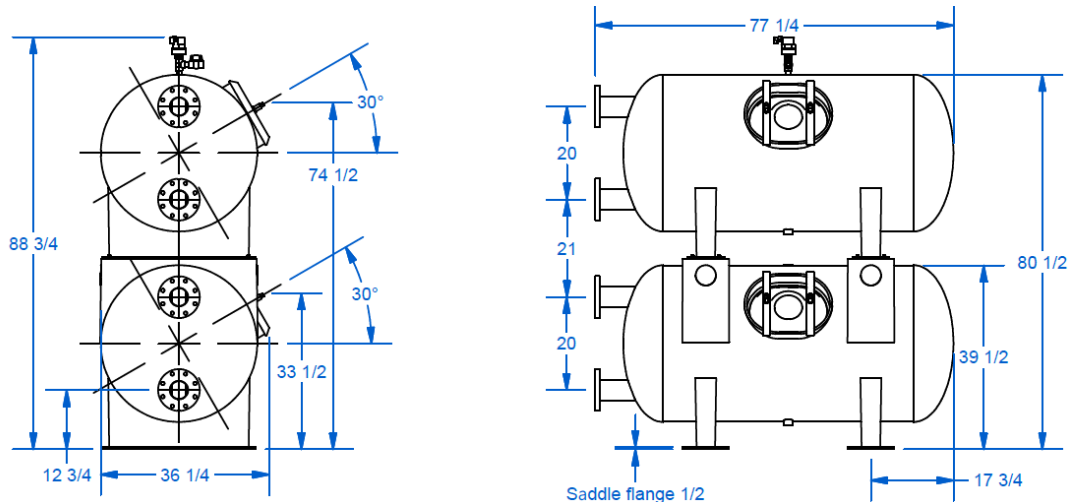

Saddle Dimensions

