


***Notes*:**



- Constructed with vinyl ester filament wound fiberglass laminate with UV inhibitors
- 50 psi working pressure
- Filtration rate of 5 – 15 GPM/SF
- Sand bed type #20 silica NSF 50
- Automatic air relief valve included
- Filter media sold separately
- All units are in inches unless otherwise specified

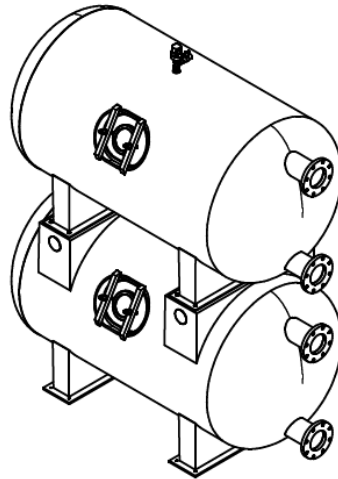

Filter Properties

Filter Diameter	48 in
Filtration Area (Total)	60 SF
Filter Rate	300 – 900 GPM/SF
Backwash Rate (Per Filter)	450 – 600 GPM/SF
Filter Flanges	6 in
Manway Location	Left
Media Quantity (Per Filter)	51.1 CF
Optional Pea Gravel (Per Filter)	9.5 CF
Dry Weight	1425 lbs

Filter Dimensions

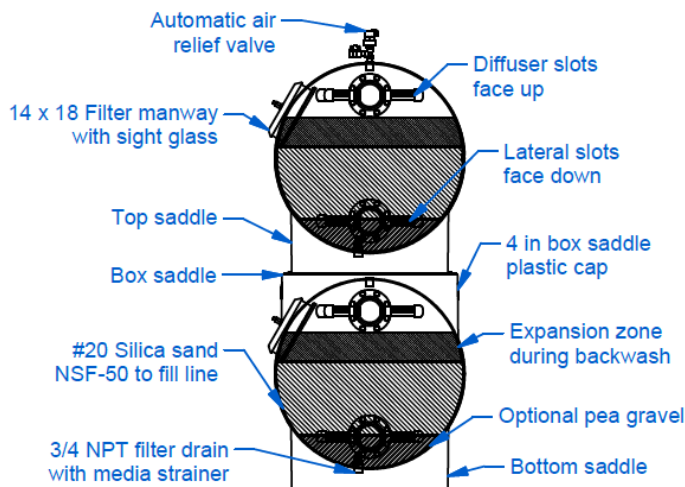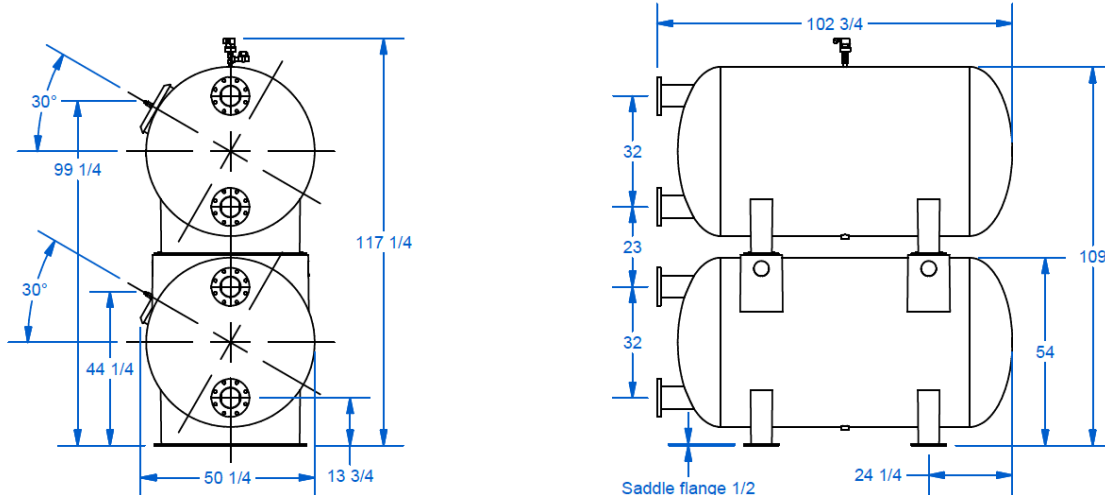

Saddle Dimensions

