



**\*Notes\*:**

- Constructed with vinyl ester filament wound fiberglass laminate with UV inhibitors
- 50 psi working pressure
- Filtration rate of 5 – 15 GPM/SF
- Sand bed type #20 silica NSF 50
- Automatic air relief valve included
- Filter media sold separately
- All units are in inches unless otherwise specified

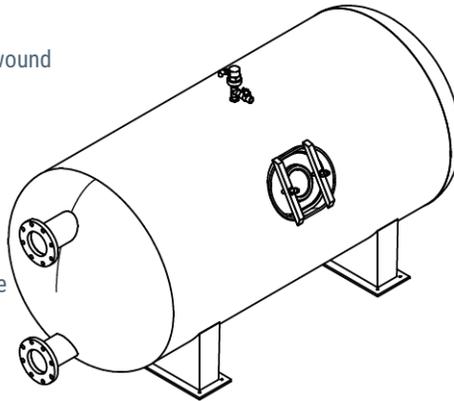

Filter Properties	
Filter Diameter	48 in
Filtration Area	35 SF
Filter Rate	175 – 525 GPM/SF
Backwash Rate (Per Filter)	525 – 700 GPM/SF
Filter Flanges	6 in
Manway Location	Right
Media Quantity (Per Filter)	59.8 CF
Optional Pea Gravel (Per Filter)	11.2 CF
Dry Weight	765 lbs

### Filter Dimensions

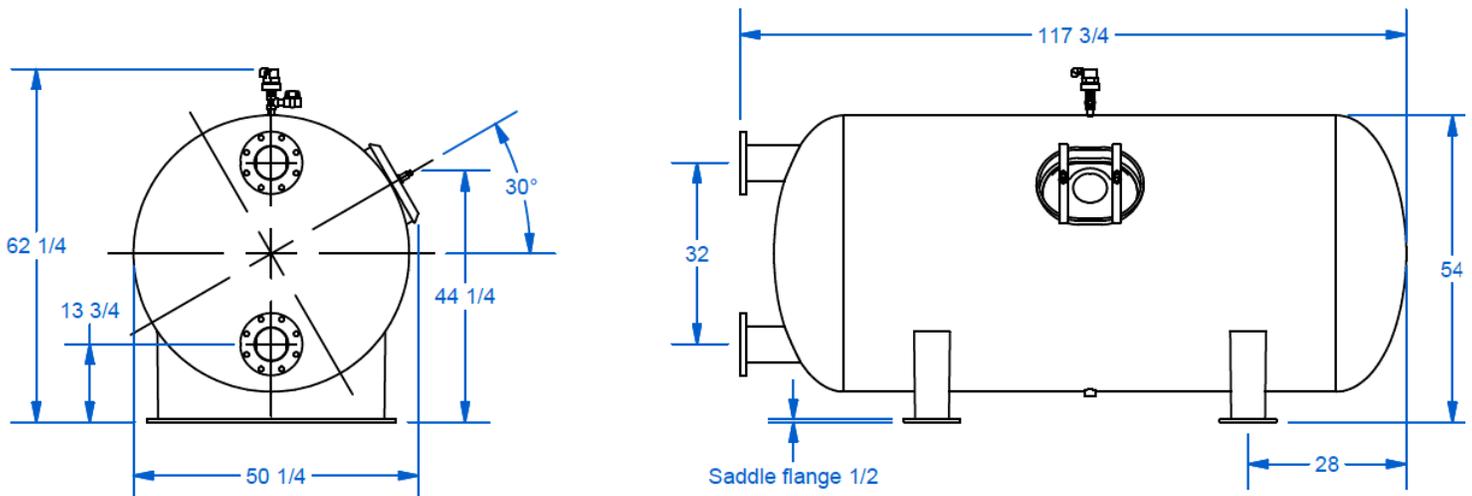

### Saddle Dimensions

