


**\*Notes\*:**



- Constructed with vinyl ester filament wound fiberglass laminate with UV inhibitors
- All units are in inches, unless otherwise specified
- 50 psi working pressure
- Sand bed type #20 silica NSF 50
- Automatic air relief valve included
- Filter media sold separately
- Filtration rate of 5 – 15 GPM/SF
- All units are in inches unless otherwise specified

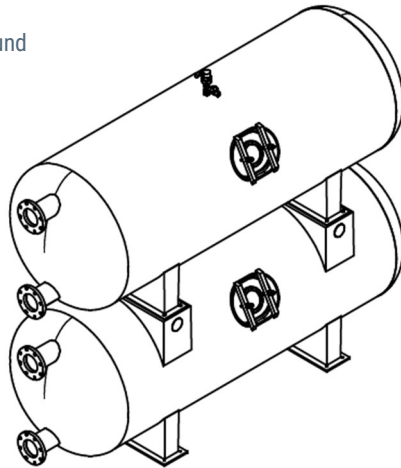

**Filter Properties**

Filter Diameter	48 in
Filtration Area (Total)	90 SF
Filter Rate	450 – 1200 GPM/SF
Backwash Rate (Per Filter)	675 – 900 GPM/SF
Filter Flanges	6 in
Manway Location	Right
Media Quantity (Per Filter)	77.2 CF
Optional Pea Gravel (Per Filter)	14.7 CF
Dry Weight	1875 lbs

## Filter Dimensions

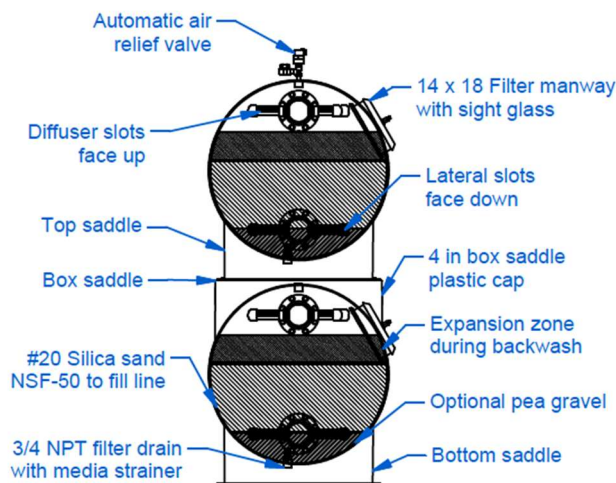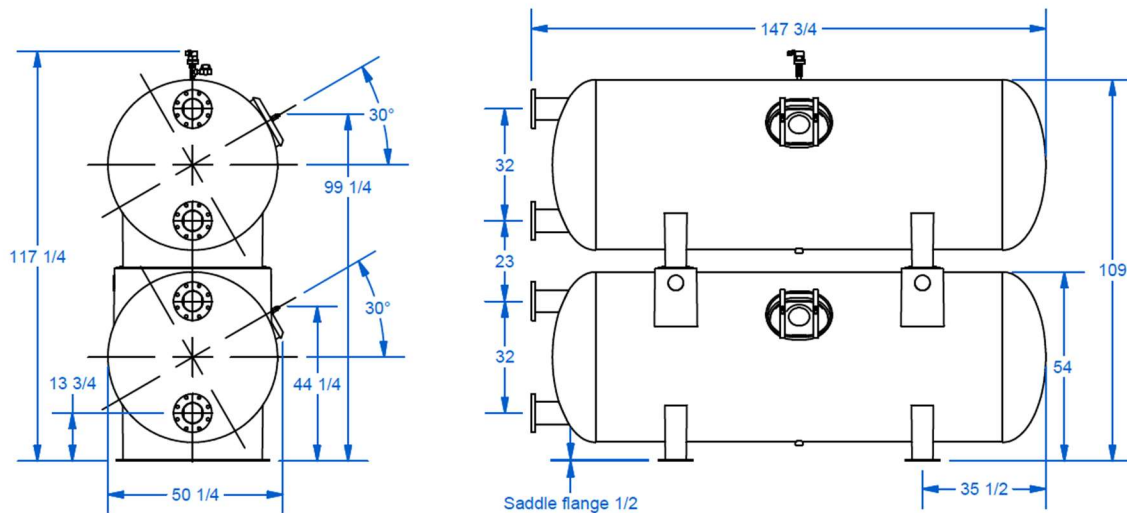

## Saddle Dimensions

