




**\*Notes\*:**

- Constructed with vinyl ester filament wound fiberglass laminate with UV inhibitors
- 50 psi working pressure
- Filtration rate of 5 – 15 GPM/SF
- Sand bed type #20 silica NSF 50
- Automatic air relief valve included
- Filter media sold separately
- All units are in inches unless otherwise specified

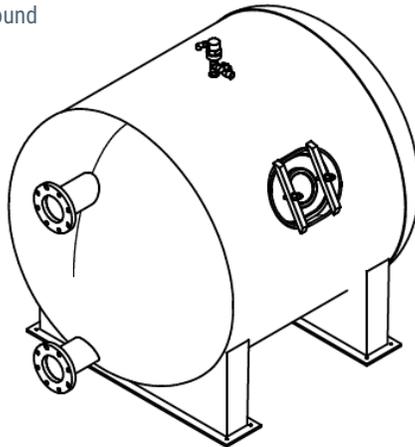

| Filter Properties                |                  |
|----------------------------------|------------------|
| Filter Diameter                  | 60 in            |
| Filtration Area                  | 30 SF            |
| Filter Rate                      | 150 – 450 GPM/SF |
| Backwash Rate (Per Filter)       | 450 – 600 GPM/SF |
| Filter Flanges                   | 6 in             |
| Manway Location                  | Right            |
| Media Quantity (Per Filter)      | 67.4 CF          |
| Optional Pea Gravel (Per Filter) | 11.4 CF          |
| Dry Weight                       | 825 lbs          |

### Filter Dimensions

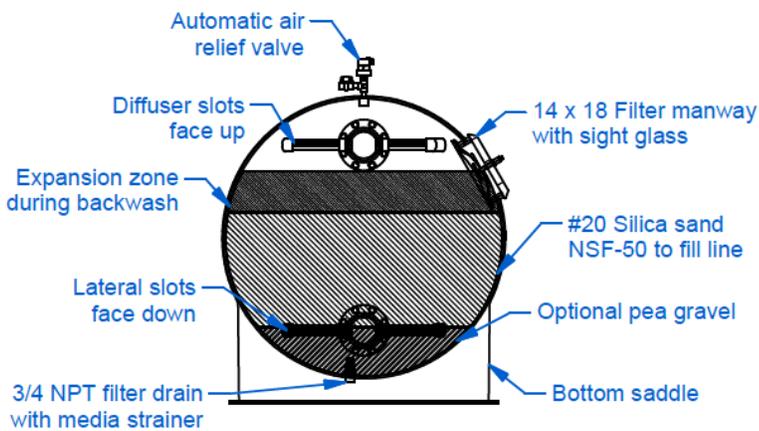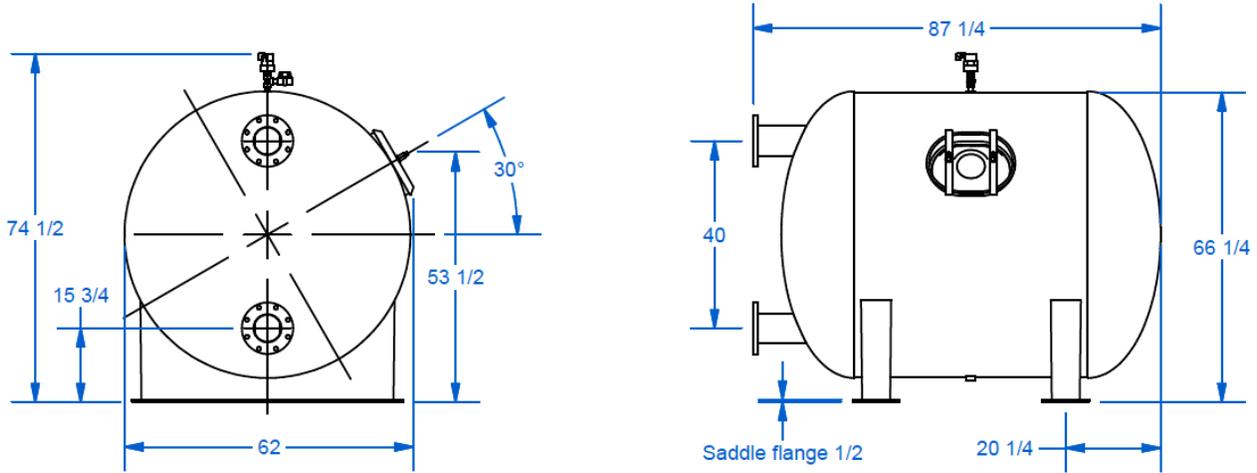

### Saddle Dimensions

