


**\*Notes\*:**




- Constructed with vinyl ester filament wound fiberglass laminate with UV inhibitors
- 50 psi working pressure
- Filtration rate of 5 – 15 GPM/SF
- Sand bed type #20 silica NSF 50
- Automatic air relief valve included
- Filter media sold separately
- All units are in inches unless otherwise specified

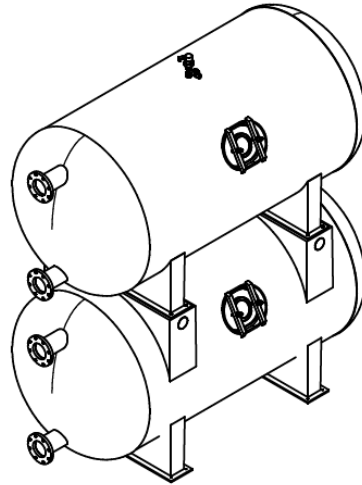

**Filter Properties**

Filter Diameter	60 in
Filtration Area (Total)	100 SF
Filter Rate	500 – 1500 GPM/SF
Backwash Rate (Per Filter)	750 – 1000 GPM/SF
Filter Flanges	6 in
Manway Location	Right
Media Quantity (Per Filter)	113.4 CF
Optional Pea Gravel (Per Filter)	20.0 CF
Dry Weight	2325 lbs

## Filter Dimensions

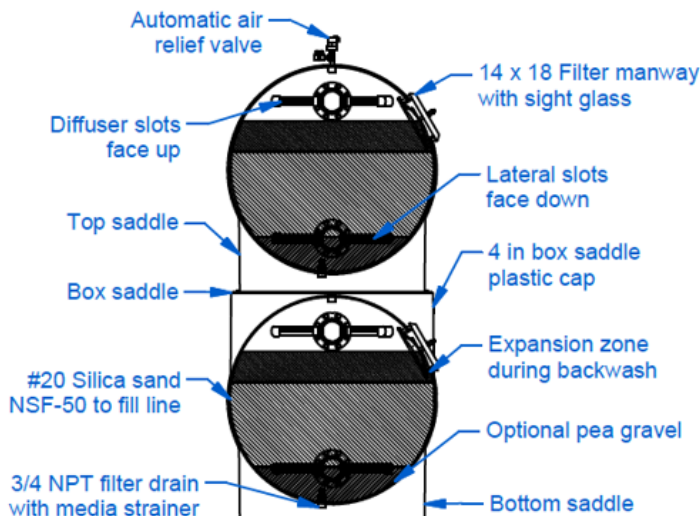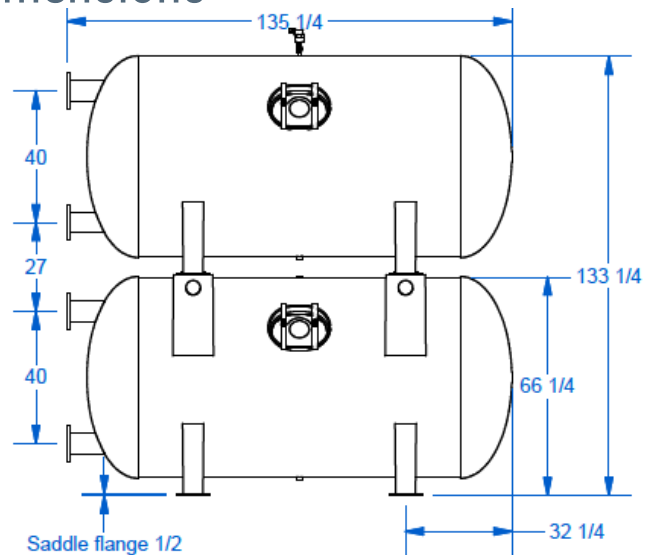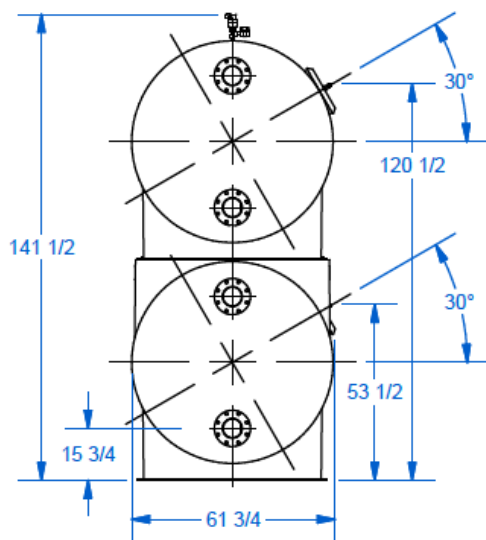

## Saddle Dimensions

