


**\*Notes\*:**



- Constructed with vinyl ester filament wound fiberglass laminate with UV inhibitors
- 50 psi working pressure
- Filtration rate of 5 – 15 GPM/SF
- Sand bed type #20 silica NSF 50
- Automatic air relief valve included
- Filter media sold separately
- All units are in inches unless otherwise specified

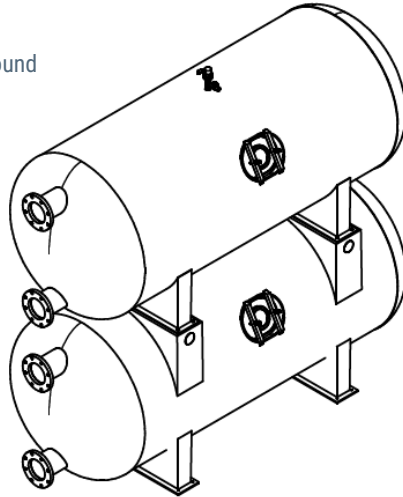

**Filter Properties**

|                                  |                   |
|----------------------------------|-------------------|
| Filter Diameter                  | 60 in             |
| Filtration Area (Total)          | 120 SF            |
| Filter Rate                      | 600 – 1800 GPM/SF |
| Backwash Rate (Per Filter)       | 900 – 1200 GPM/SF |
| Filter Flanges                   | 8 in              |
| Manway Location                  | Right             |
| Media Quantity (Per Filter)      | 136.6 CF          |
| Optional Pea Gravel (Per Filter) | 24.3 CF           |
| Dry Weight                       | 2575 lbs          |

## Filter Dimensions

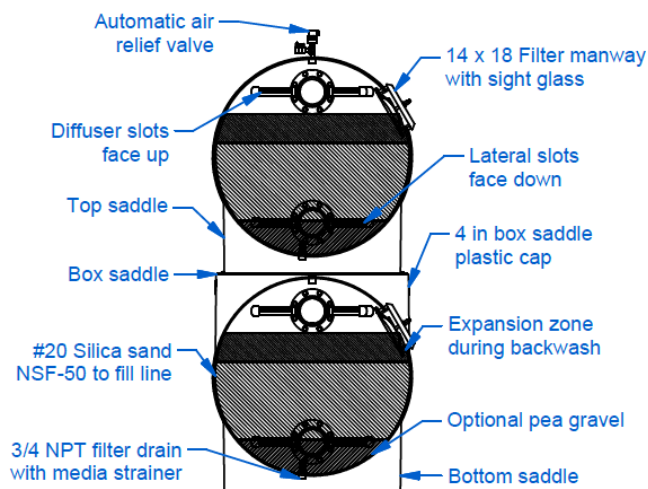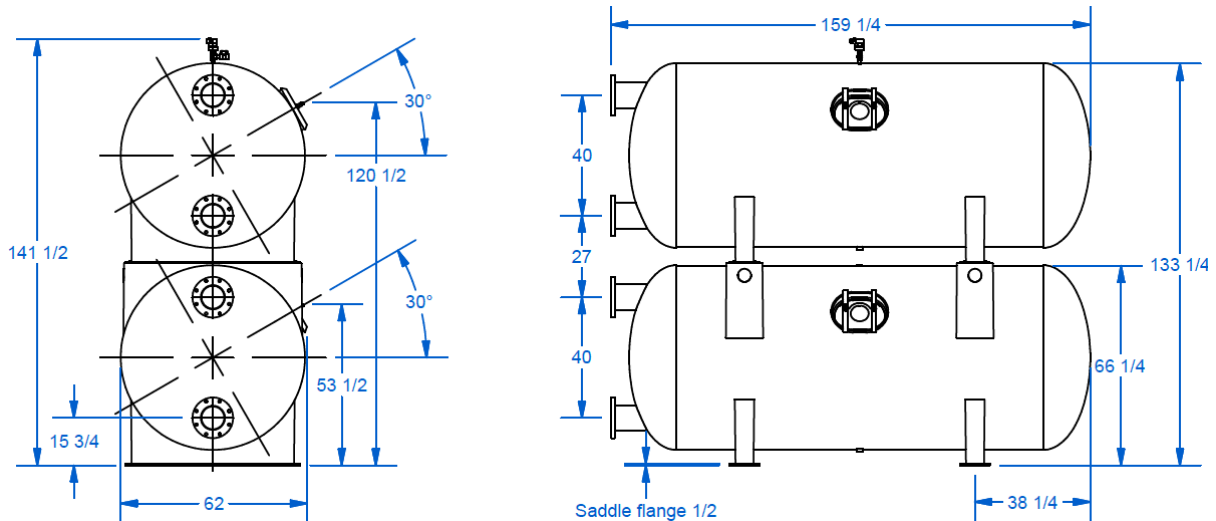

## Saddle Dimensions

