



***Notes*:**

- Constructed with vinyl ester filament wound fiberglass laminate with UV inhibitors
- 50 psi working pressure
- Filtration rate of 5 – 15 GPM/SF
- Sand bed type #20 silica NSF 50
- Automatic air relief valve included
- Filter media sold separately
- All units are in inches unless otherwise specified

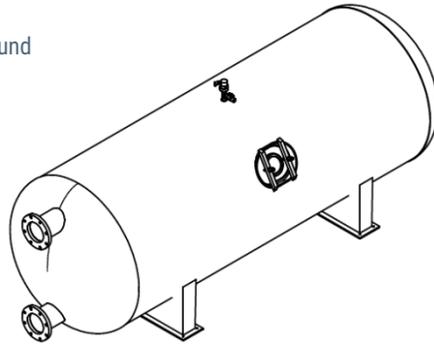

| Filter Properties | |
|----------------------------------|--------------------|
| Filter Diameter | 60 in |
| Filtration Area | 70 SF |
| Filter Rate | 350 – 1050 GPM/SF |
| Backwash Rate (Per Filter) | 1050 – 1400 GPM/SF |
| Filter Flanges | 8 in |
| Manway Location | Right |
| Media Quantity (Per Filter) | 160.2 CF |
| Optional Pea Gravel (Per Filter) | 28.8 CF |
| Dry Weight | 1425 lbs |

Filter Dimensions

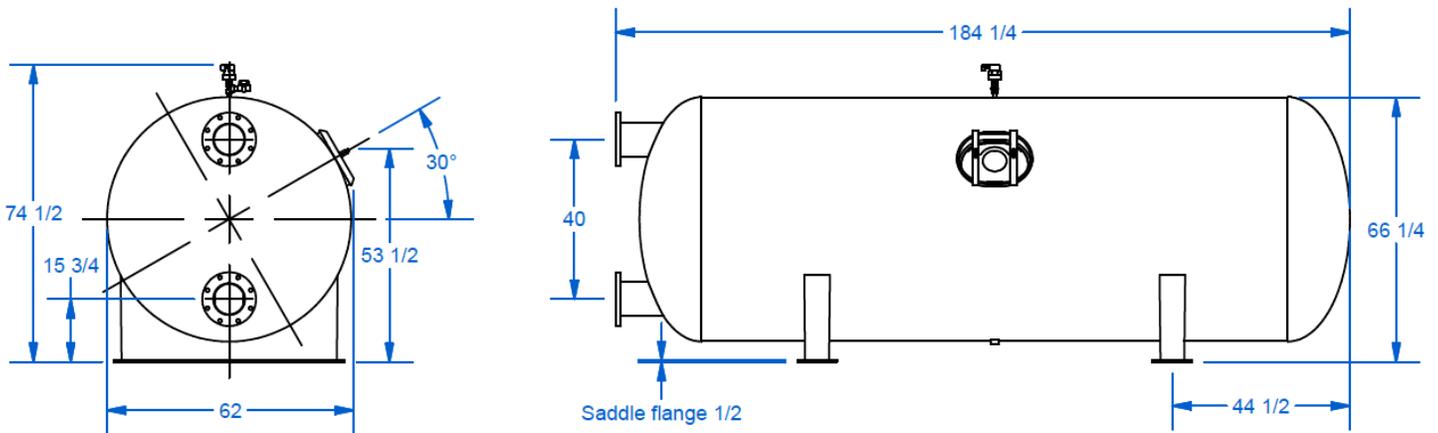

Saddle Dimensions

