


***Notes*:**




- Constructed with vinyl ester filament wound fiberglass laminate with UV inhibitors
- 50 psi working pressure
- Filtration rate of 5 – 15 GPM/SF
- Sand bed type #20 silica NSF 50
- Automatic air relief valve included
- Filter media sold separately
- All units are in inches unless otherwise specified

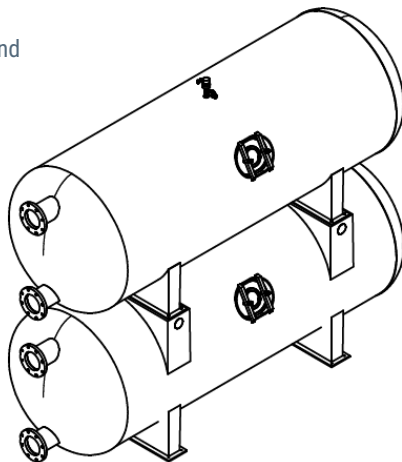

Filter Properties

Filter Diameter	60 in
Filtration Area (Total)	140 SF
Filter Rate	700 – 2100 GPM/SF
Backwash Rate (Per Filter)	1050 – 1400 GPM/SF
Filter Flanges	8 in
Manway Location	Right
Media Quantity (Per Filter)	160.2 CF
Optional Pea Gravel (Per Filter)	28.8 CF
Dry Weight	2875 lbs

Filter Dimensions

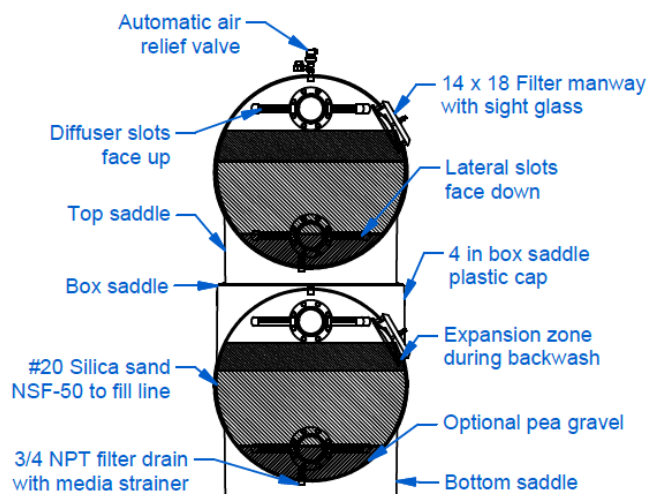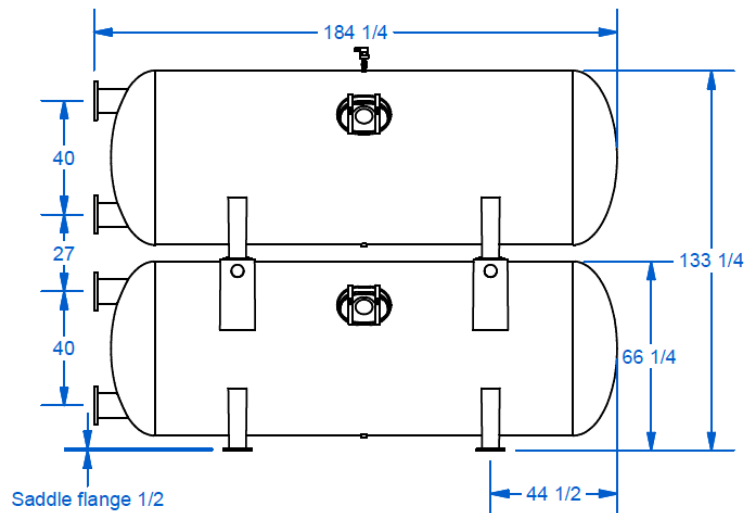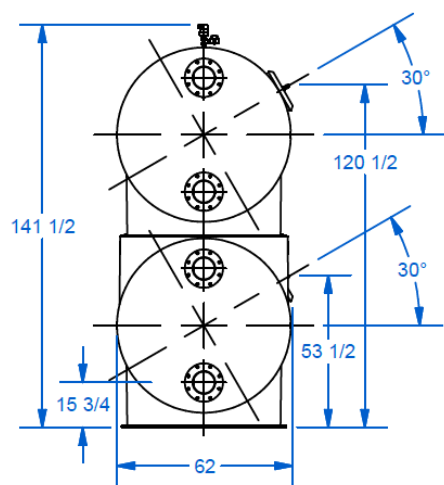

Saddle Dimensions

