



**\*Notes\*:**

- Constructed with vinyl ester filament wound fiberglass laminate with UV inhibitors
- 50 psi working pressure
- Filtration rate of 5 – 15 GPM/SF
- Sand bed type #20 silica NSF 50
- Automatic air relief valve included
- Filter media sold separately
- All units are in inches unless otherwise specified

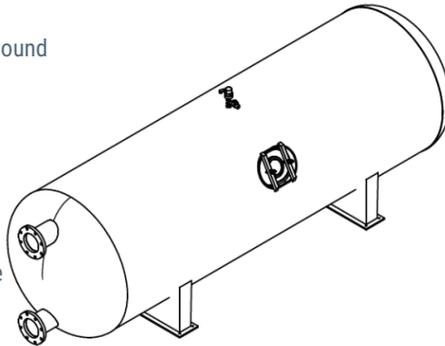

Filter Properties	
Filter Diameter	60 in
Filtration Area	80 SF
Filter Rate	400 – 1200 GPM/SF
Backwash Rate (Per Filter)	1200 – 1600 GPM/SF
Filter Flanges	8 in
Manway Location	Right
Media Quantity (Per Filter)	183.2 CF
Optional Pea Gravel (Per Filter)	33.1 CF
Dry Weight	1550 lbs

### Filter Dimensions

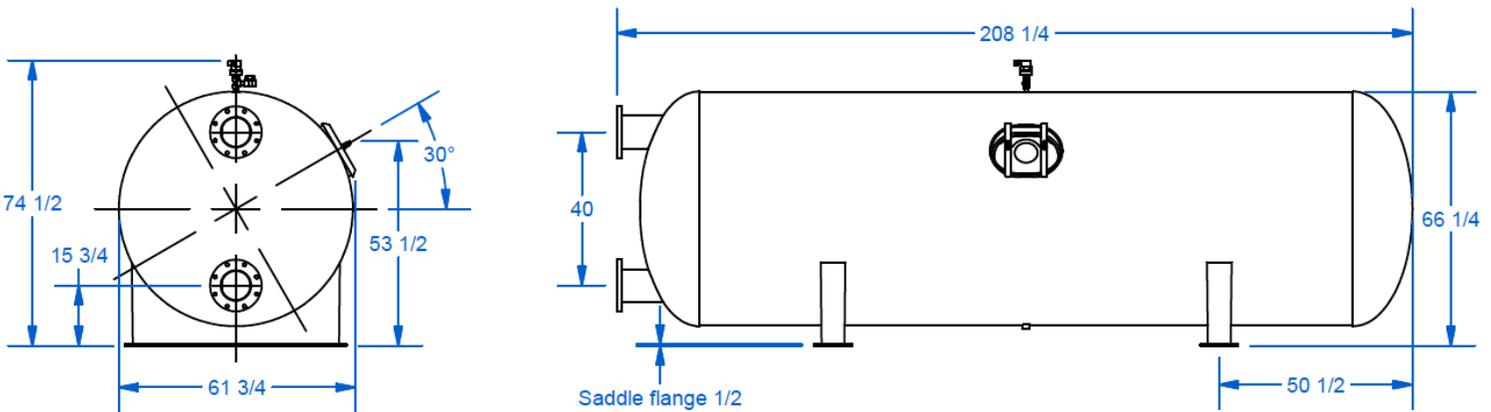

### Saddle Dimensions

