
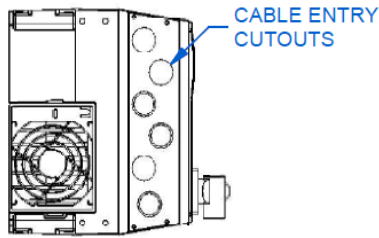



***Notes*:**

- Shielded cable required from VFD to motor
- Optional Three Phase [3PH] in and Single Phase [1PH] out is available
- All units are in inches otherwise specified







VFD Properties	
Enclosure	IP66 [NEMA 4X]
Frame Size	A5
Rated	3 HP [1.5 – 2.2 Kw]
Supply Voltage [+/- 10%]	200 – 240V
Phase	3
Output Current 200–240V	10.6 A
Supply Frequency	50 / 60 Hz
Max Ambient Temperature	122 °F / 50 °C
Fused Disconnect	Yes
Weight	30 lbs

VFD Dimensions



DETAIL A

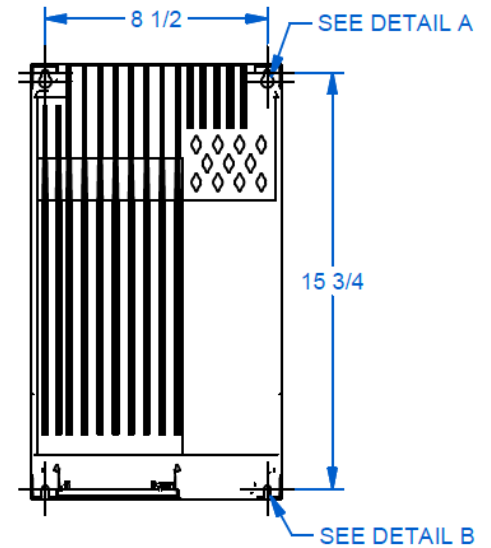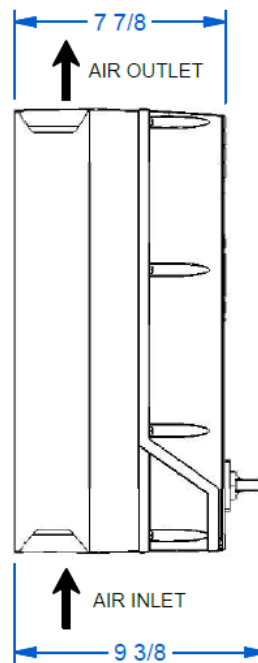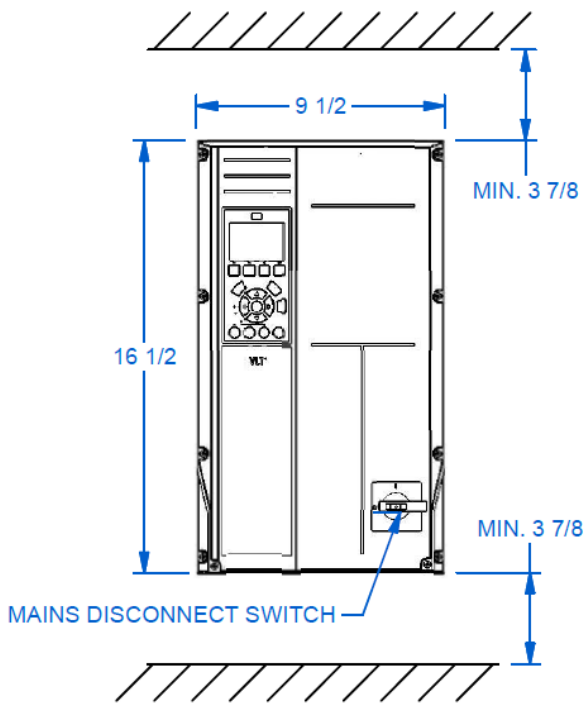

DETAIL B