
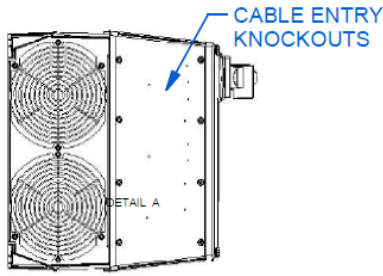



***Notes*:**

- Shielded cable required from VFD to motor
- All units are in inches otherwise specified




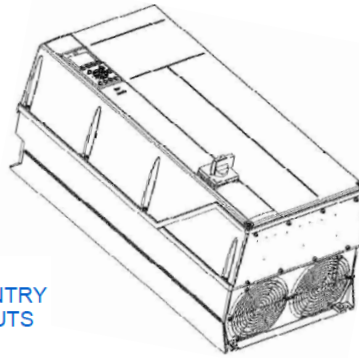


VFD Properties	
Enclosure	IP66 [NEMA 4X]
Frame Size	C2
Rated	50 HP [30 – 37 Kw]
Supply Voltage [+/- 10%]	200 – 240V
Phase	3
Output Current 200 – 240V	143 A
Supply Frequency	50 / 60 Hz
Max Ambient Temperature	122 °F / 50 °C
Fused Disconnect	Yes
Weight	135 lbs

VFD Dimensions



DETAIL A

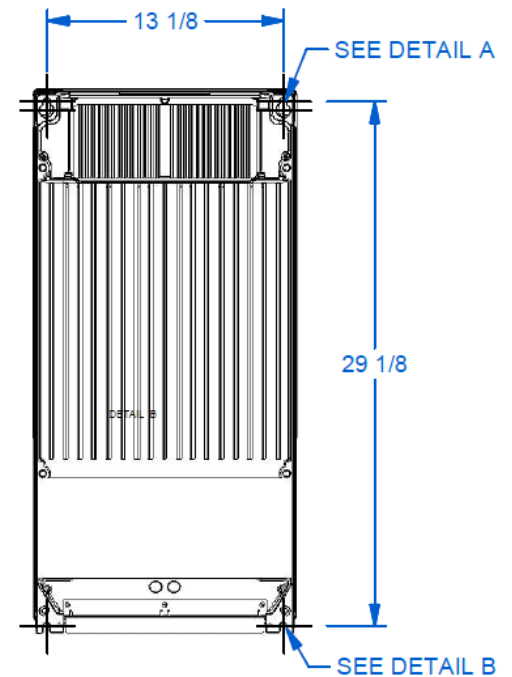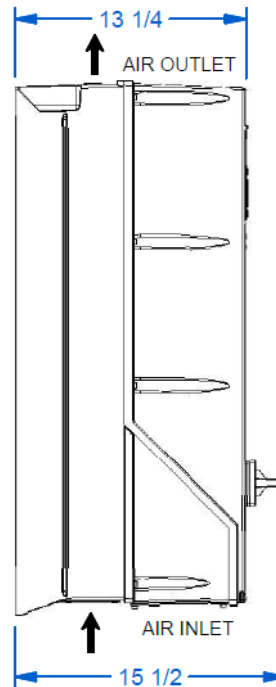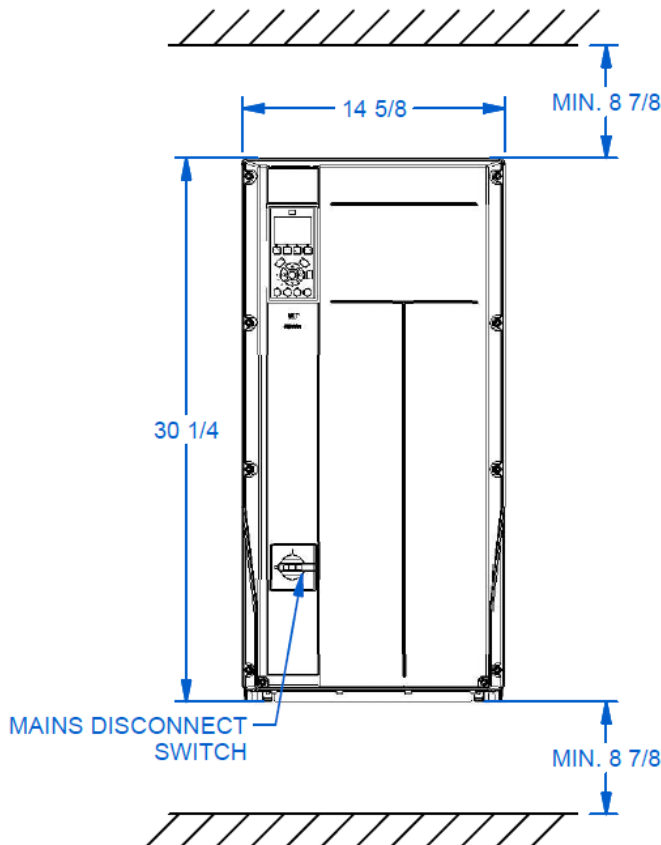

DETAIL B