
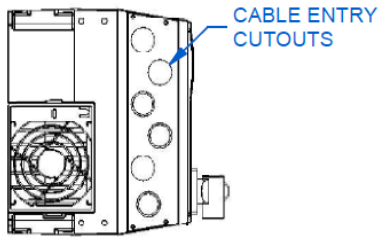


***Notes*:**


- Shielded cable required from VFD to motor
- All units are in inches otherwise specified







VFD Properties

Enclosure	IP66 [NEMA 4X]
Frame Size	A5
Rated	5 HP [2.2 – 4 Kw]
Supply Voltage [+/- 10%]	380 – 480V
Phase	3
Output Current 380–440V / 441–480V	10 / 8.2 A
Supply Frequency	50 / 60 Hz
Max Ambient Temperature	122 °F / 50 °C
Fused Disconnect	Yes
Weight	30 lbs

VFD Dimensions



DETAIL A

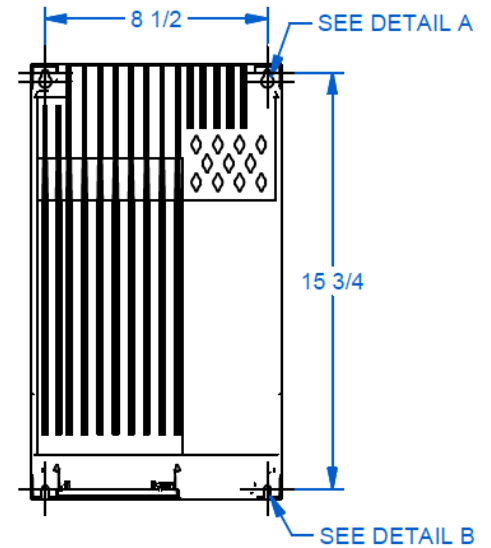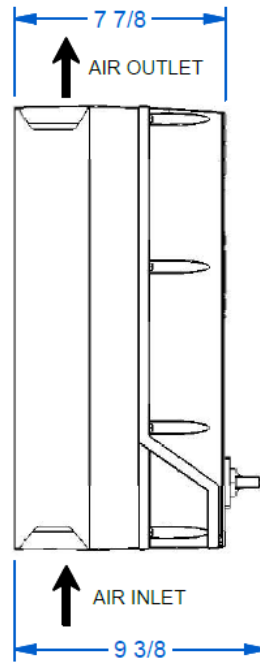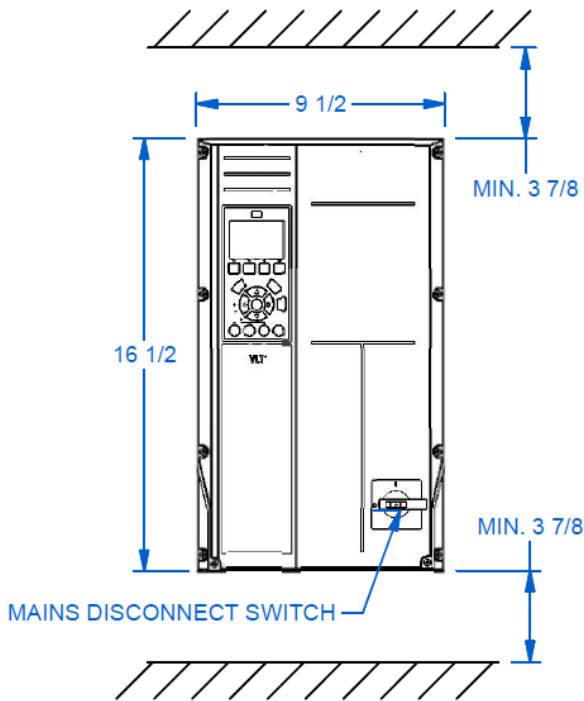

DETAIL B