
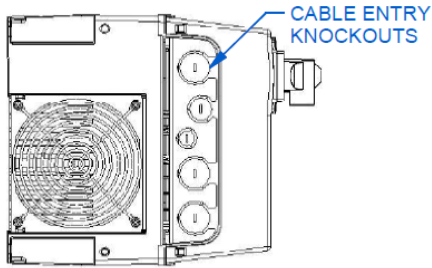





***Notes*:**

- Shielded cable required from VFD to motor
- Optional Three Phase [3PH] in and Single Phase [1PH] out is available
- All units are in inches otherwise specified


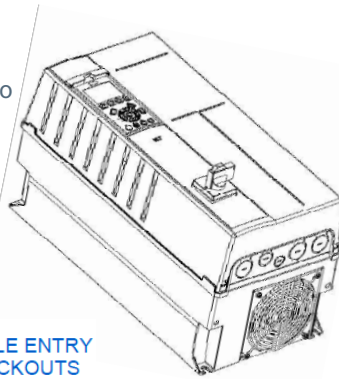


VFD Properties	
Enclosure	IP66 [NEMA 4X]
Frame Size	B1
Rated	25 HP [15 – 18.5 Kw]
Supply Voltage [+/- 10%]	380 – 480V
Phase	3
Output Current 380–440V / 441–480V	37.5 / 34 A
Supply Frequency	50 / 60 Hz
Max Ambient Temperature	122 °F / 50 °C
Fused Disconnect	Yes
Weight	51 lbs

VFD Dimensions

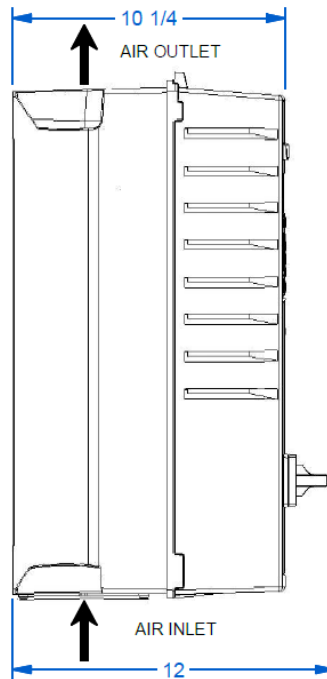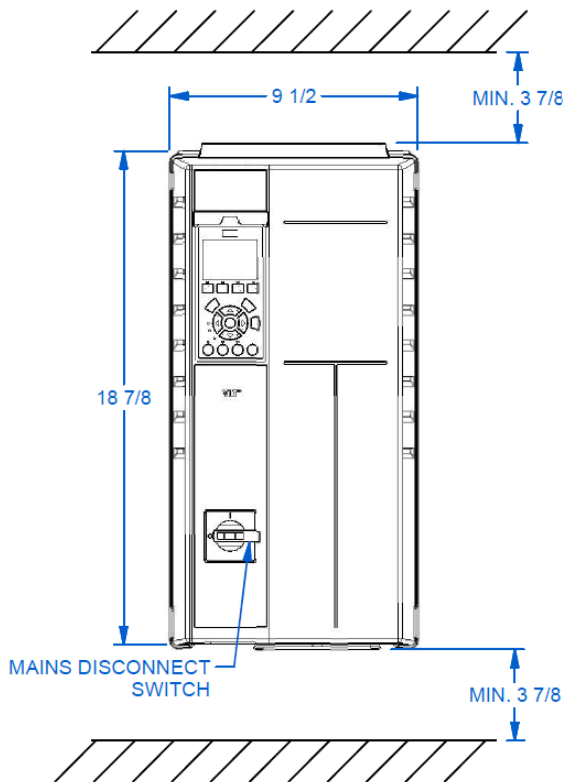

DETAIL A

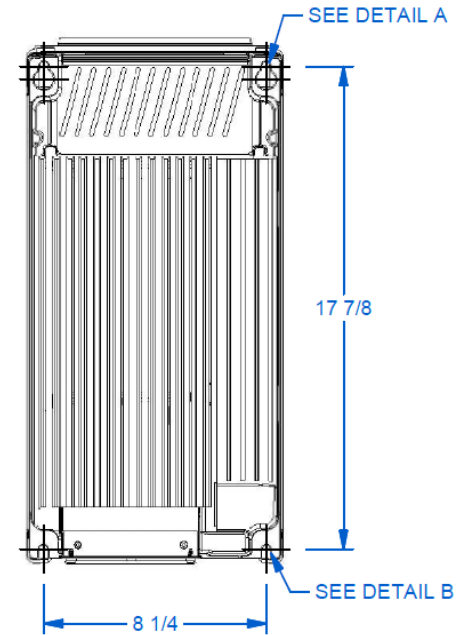

DETAIL B