
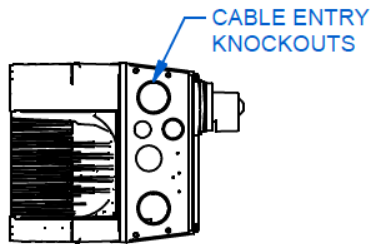


***Notes*:**


- Shielded cable required from VFD to motor
- All units are in inches otherwise specified





VFD Properties

Enclosure	IP66 [NEMA 4X]
Frame Size	B2
Rated	30 HP [18.5 – 22 Kw]
Supply Voltage [+/- 10%]	380 – 480V
Phase	3
Output Current 380–440V / 441–480V	44 / 40 A
Supply Frequency	50 / 60 Hz
Max Ambient Temperature	122 °F / 50 °C
Fused Disconnect	Yes
Weight	60 lbs

VFD Dimensions



DETAIL A

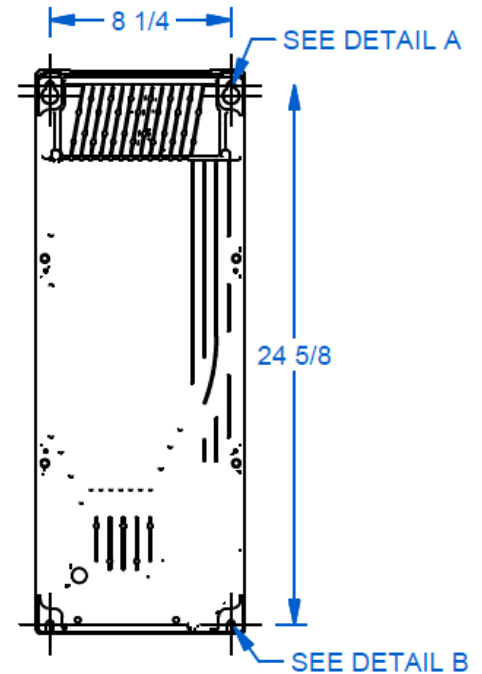

DETAIL B

