
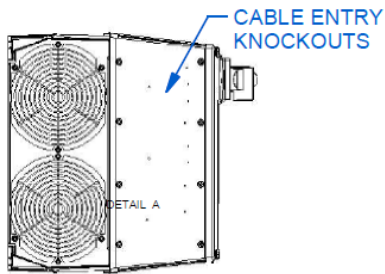



***Notes*:**

- Shielded cable required from VFD to motor
- All units are in inches otherwise specified







VFD Properties	
Enclosure	IP66 [NEMA 4X]
Frame Size	C2
Rated	100 HP [18.5 – 22 Kw]
Supply Voltage [+/- 10%]	380 – 480V
Phase	3
Output Current 380–440V / 441–480V	44 / 40
Supply Frequency	50 / 60 Hz
Max Ambient Temperature	122 °F / 50 °C
Fused Disconnect	Yes
Weight	140 lbs

VFD Dimensions



DETAIL A

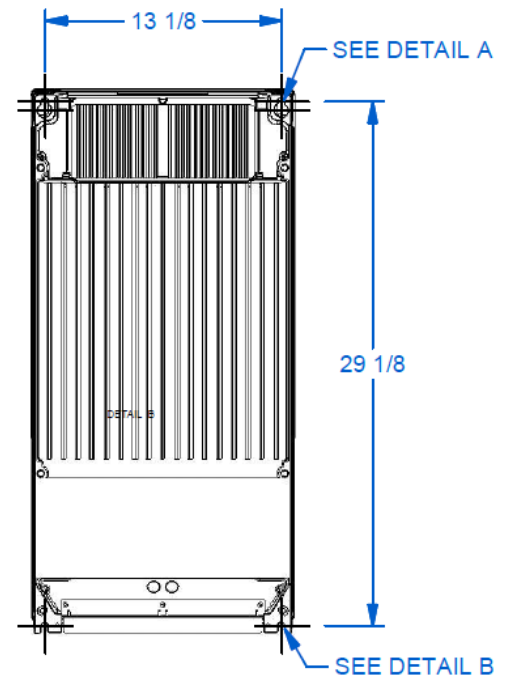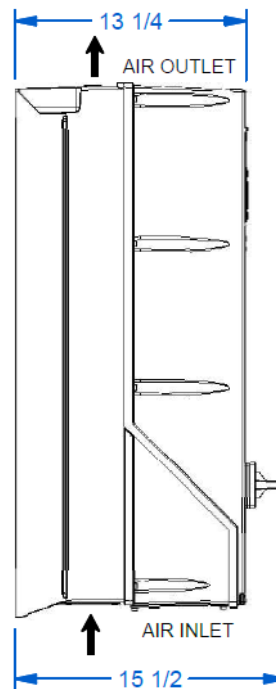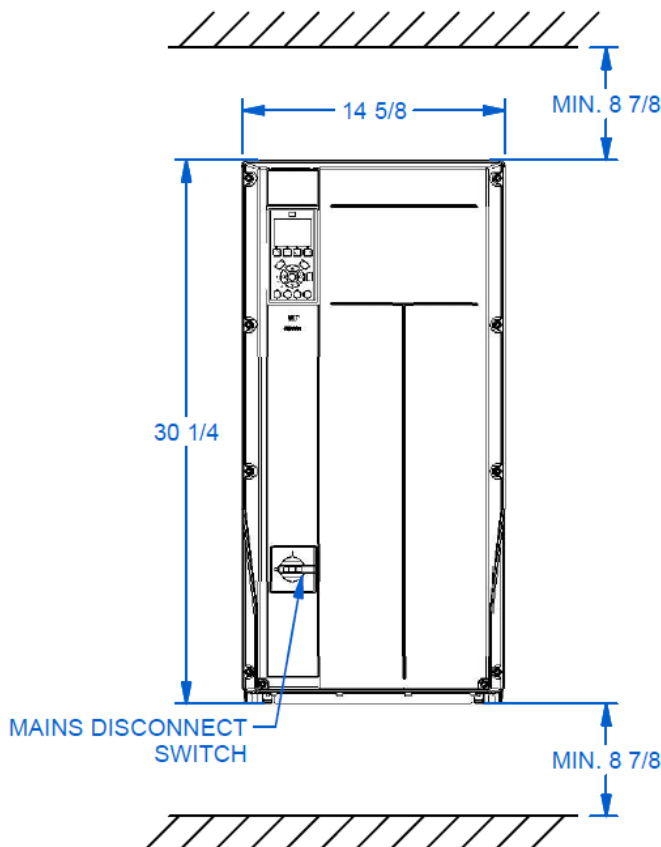

DETAIL B